

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® TSK1028 – 2x0,35 mm² - ZERO LOSS

Balanced Microphone Cable with Conductive Tape



A	B	C	D	E
---	---	---	---	---

CATEGORY APPLICATIONS

Balanced Microphone Cable
 Long distances Audio connections

- A:** Black soft PVC sheath. Outer Diam. Ø: 6,30 (±0,20) mm.
- B:** Braided Shield in O.F.C. tinned copper, covering 90%.
- C:** Special Active Carbon screen tape.
- D:** Core Insulation with compact Transparent PE.
Diam. Ø 1,70 (±0,20) mm.
- E:** One conductor in O.F.C. red copper and one in O.F.C. tinned copper –
formation 11x0,20 mm. Nom. Cross section 2x0,35 mm².


MARKING

tasker® TSK 1028 2x0,35 mm² - O.F.C.- **ZERO LOSS** - Low Capacitance – Active Carbon Screen - Audio Microphone Cable Made in Italy

CUSTOM

This product is also available in **L.S.Z.H., PE, PUR**, with or without **Steel Armor**.

Attenuation Test – Start 9 KHz – Stop 25 KHz

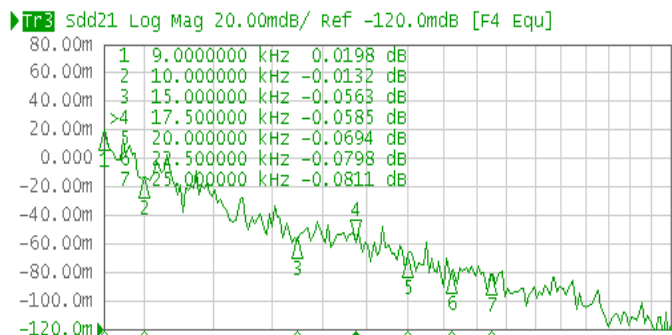

Cable Properties

Conductor Resistance	58 Ω/Km
Capacity Core/Core	55 pF/mt
Capacity Core/Shield	90 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			